

## PRODUCT SHEET

### Through wall parapet drain for TPO membrane



**Article:**

i39.2P

**Dimensions:**

100 × 100 [mm]

**In a box:**

20 pcs.

Made of special material that binds well with TPO membranes, they are characterised by high resistance to UV radiation, ozone, and other atmospheric and chemical agents.


Due to refining additives, the roof drains maintain their flexibility and dimensional stability in a wide temperature range and provide short-time resistance to welding, enabling you to weld them directly to bitumen membrane.

Can be used in horizontal drainage systems (directly outside of the building) as well as in vertical systems with a standard external downpipe using **an elbow connector** or **a conical rainhead**.

When installed horizontally, make sure the drain is pitched at a 3 - 5 degree angle.

Can be installed vertically at an attic.

### Technical drawing

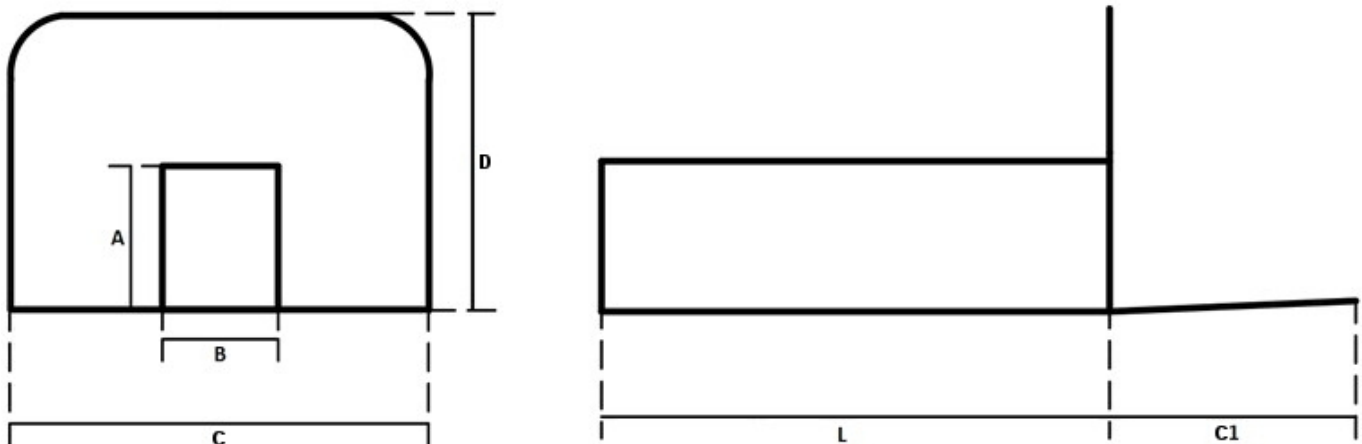

Articles:	A	B	C	C1	D	L
i39.2P	100	100	349	100	175	500

\* Values in mm.

