

## PRODUCT SHEET

### Through wall parapet drain for TPO membrane



Article:	Diameter:	In a box:
150-350-500-050	50 [mm]	10 pcs.
150-350-500-063	63 [mm]	10 pcs.
150-350-500-075	75 [mm]	10 pcs.
150-350-500-090	90 [mm]	10 pcs.
150-350-500-110	110 [mm]	10 pcs.
150-350-500-125	125 [mm]	10 pcs.

Made of special material that binds well with TPO membranes, they are characterised by high resistance to UV radiation, ozone, and other atmospheric and chemical agents.


Due to refining additives, the roof drains maintain their flexibility and dimensional stability in a wide temperature range and provide short-time resistance to welding, enabling you to weld them directly to bitumen membrane.

Can be used in horizontal drainage systems (directly outside of the building) as well as in vertical systems with a standard external downpipe using **an elbow connector** or **a conical rainhead**.

When installed horizontally, make sure the drain is pitched at a 3 - 5 degree angle.

Can be installed vertically at an attic.

Technical drawing

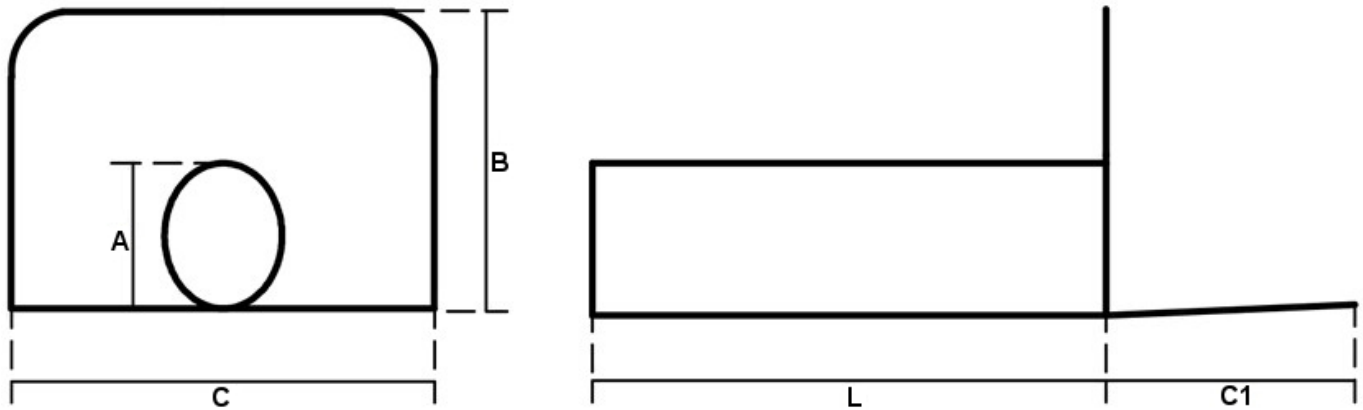

Articles:	A	B	C	C1	L
150-350-500-050	50	140	260	110	500
150-350-500-063	63	175	304	130	500
150-350-500-075	75	175	304	130	500
150-350-500-090	90	215	304	130	500
150-350-500-110	110	215	304	130	500
150-350-500-125	125	260	360	130	500

\* Values in mm.