

PRODUCT SHEET

Paving support pads with height regulation PLUS - fugue 2 mm



Article:	Height:	In a box:
187.02	22 - 35 [mm]	25 pcs.
187.12	35 - 55 [mm]	25 pcs.
187.22	55 - 95 [mm]	25 pcs.
187.32	95 - 165 [mm]	25 pcs.
187.42	165 - 235 [mm]	25 pcs.
187.52	200 - 270 [mm]	25 pcs.
187.62	260 - 340 [mm]	25 pcs.
187.72	305 - 375 [mm]	25 pcs.
187.82	365 - 445 [mm]	25 pcs.
187.92	410 - 480 [mm]	25 pcs.
187.102	470 - 550 [mm]	25 pcs.

Paving support pads with height regulation PLUS were designed to combine high quality and reasonable price. Many researches helped to achieve very high weight tolerance with reduced usage of materials.

Now we have product that can hold even 800 kg (already reduced by 50% for safety) and still its own weight is meaningly low. Height regulation provides solid construction from 22 mm up to 550 mm.

Tabs on the head provide lug width 2 mm and their purpose is for paving slabs. It's not possible to mix regulated pads with modular pads.


BENEFITS:

- stability
- very high weight tolerance (**800 kg!**)
- fast and simple solution to construct aesthetic floor
- wide height regulation
- height starts with 22 mm
- very low own weight

- rubber shim 2,5 mm (**article 240-910-150-003**) is good addition as an amortization between slabs and supports

One support pad has weight tolerance **800 KG**. This value is already reduced by 50% for safety reasons.

Technical drawing

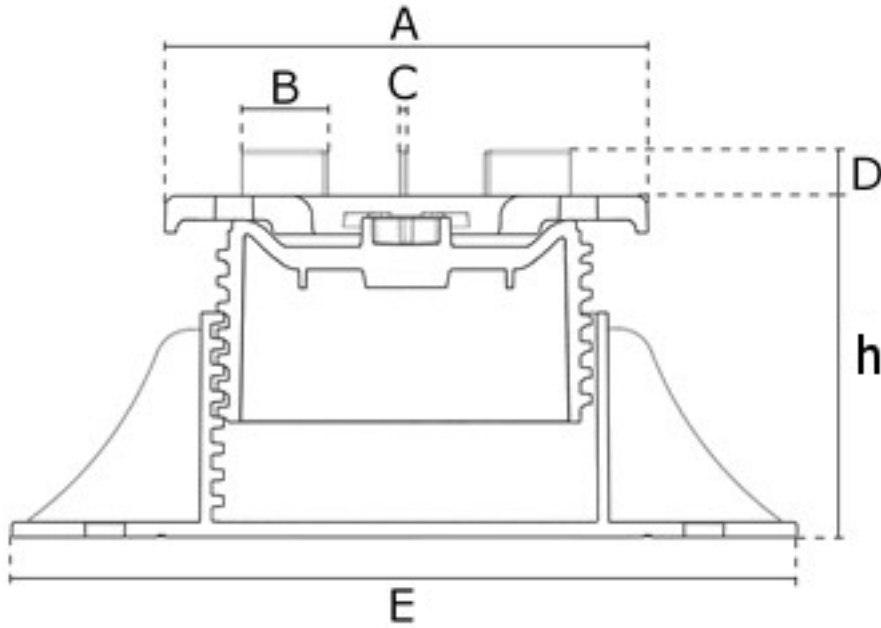

Articles:	A	B	C - lug width	D	E	h
Depends on height regulation	120	18	2	10	200	Depends on height regulation

*Values in mm.

Diameter of the base: 200 [mm]

Price for single unit.