Polprofili
st. Białośliwska 21, Poland
60-418 Poznań

Phone: (+48) 504 134 090
office@polprofili.com
www.polprofili.com

PRODUCT SHEET

Sure-Fix 330 roof outlet

Article:	Diameter:	In a box:
i129	75 [mm]	20 pcs.
i130	80 [mm]	20 pcs.
i132	100 [mm]	20 pcs.
i133	110 [mm]	20 pcs.
i134	125 [mm]	20 pcs.
i136	150 [mm]	15 pcs.

Sure-Fix roof drains provide one of the best ways to connect the roof slope with the drainage system. Recommended in particular for flat roofs in both housing and industrial construction.

Sure-Fix is fastened and sealed mechanically, therefore it can be used with all kinds of thermoplastic bitumen membranes, film, EPDM membranes, and all other kinds of membranes.

As a meticulously refined product, it is superior to any roof drains available on the market.

Consists of a flexible shell with six stainless steel pins. A cylindrical hopper (height: 30 mm, diameter: 170 mm) provides a high rate of draining even during very intensive rainfall.

The set includes an aluminium ring (thickness: 3.5 mm) with three fastenings **for a guard (item i24)** and six holes for pins.

The aluminium part is resistant to corrosion. Stainless steel wing nuts and pins provide perfect tightness and do not require using additional gaskets.

Sure-Fix is made from special material characterised by high resistance to UV radiation, ozone, and other atmospheric and chemical agents Due to refining additives, the roof drains maintain their flexibility and dimensional stability in a wide temperature range

The roof drain can be dismounted and installed again.

Technical drawing

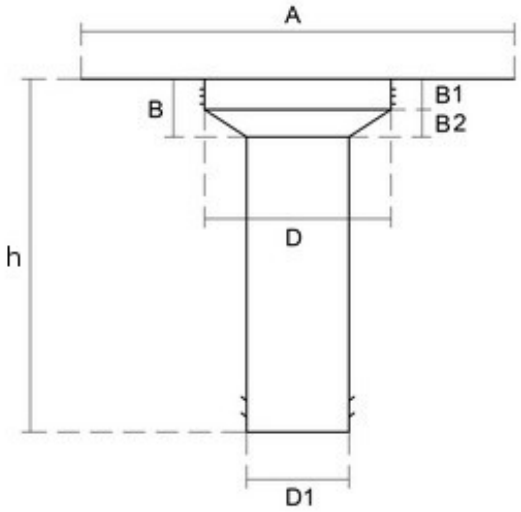

Articles:	A	B	B1	B2	D	D1	h
i129	340	50	25	25	215	75	330
i130	340	50	25	25	215	80	330
i132	340	50	25	25	215	100	330
i133	340	85	25	60	210	110	330
i134	340	50	25	25	215	125	330
i136	330	50	25	25	215	150	340

* Values in mm.

The **i24** protective guard is sold separately.

Increased flow capacity l/s

Length: 330 [mm]

Flow capacity l/s

Diameter:	H* 1cm:	H* 10cm:
75 [mm]	1,6 l/s	4,8 l/s
80 [mm]	1,9 l/s	5,3 l/s
100 [mm]	2,9 l/s	8,5 l/s
110 [mm]	3,5 l/s	11,5 l/s
125 [mm]	4,6 l/s	15,0 l/s
151 [mm]	6,8 l/s	19,5 l/s

* H – Height of water column