

PRODUCT SHEET

Through wall parapet drain for bitumen membrane



Article:	Diameter:	In a box:
i304	63 [mm]	20 pcs.
i305	75 [mm]	20 pcs.
i307	80 [mm]	20 pcs.
i310	100 [mm]	20 pcs.
i311	110 [mm]	20 pcs.
i312	125 [mm]	16 pcs.

Made of special material that binds well with bitumen membranes, they are characterised by high resistance to UV radiation, ozone, and other atmospheric and chemical agents


Due to refining additives, the roof drains maintain their flexibility and dimensional stability in a wide temperature range and provide short-time resistance to welding, enabling you to weld them directly to bitumen membrane.

Can be used in horizontal drainage systems (directly outside of the building) as well as in vertical systems with a standard external downpipe using **an elbow connector** or **a conical rainhead**.

When installed horizontally, make sure the drain is pitched at a 3 - 5 degree angle.

Can be installed vertically at an attic.

Technical drawing

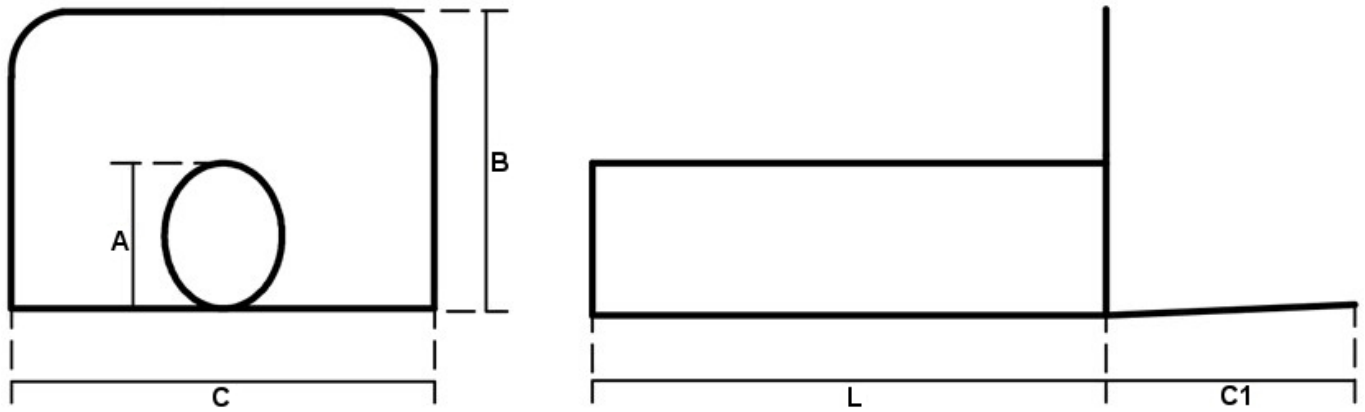

Articles:	A	B	C	C1	L
i304	63	174	348	118	500
i305	75	174	348	118	500
i307	80	174	348	118	500
i310	100	174	348	118	500
i311	110	174	348	118	500
i312	125	174	348	118	500

* Values in mm.